


Mounting Reference


Arbor style

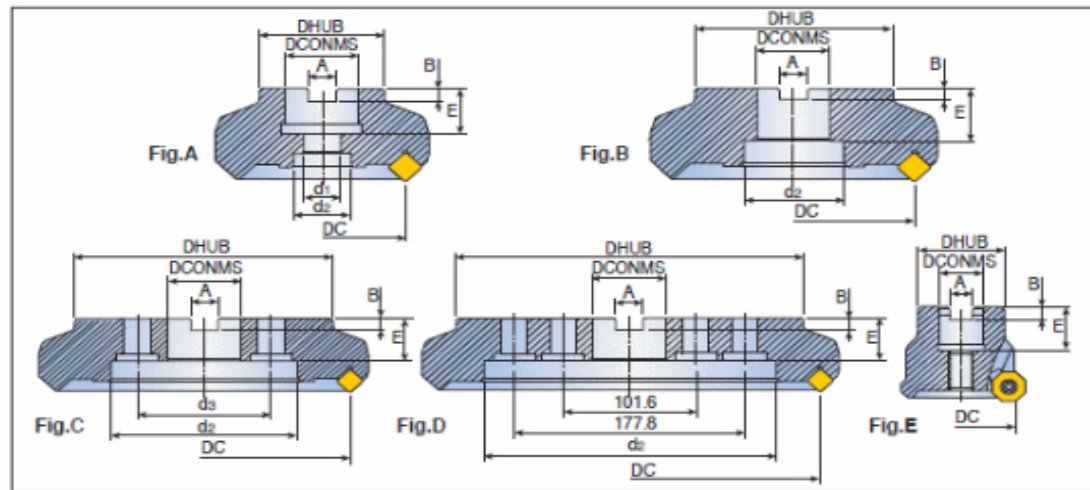


Dimension (mm)										Fig.	Arbor
DC	DCONMS	A	B	E	DHUB		d1	d2	d3		
					For mold & die	For general					
32	16	8.4	5.6	20	30	-	-	-	-	E	SEM16
32	16	8.4	5.6	20	30	-	9	13.5	-	A	SEM16
40	16	8.4	5.6	20	38	-	9	13.5	-	A	SEM16
40	22	10.4	6.3	22	38	-	11	17	-	A	SEM22
50	22	10.4	6.3	22	40	45	11	17	-	A	SEM22
63	22	10.4	6.3	22	47	-	11	17	-	A	SEM22
80	25.4	9.526	6	26	-	70	13	20	-	A	FMA25.4
80	27	12.4	7	28	58	70	13	22	-	A	SEM27
100	31.75	12.7	8	32	-	80	18	26	-	A	FMA31.75
100	31.75	12.7	8	32	-	80	-	46	-	B	FMA31.75
100	32	14.4	8	26	66	85	18	26	-	A	SEM32
100	32	14.4	8	26	66	85	-	46	-	B	SEM32
125	38.1	15.875	10	38	80	-	-	56	-	B	FMA38.1
125	40	16.4	9	32	85	-	22	32	-	A	SEM40
125	40	16.4	9	32	85	-	-	56	-	B	SEM40
160	40	16.4	9	32	110	-	-	90	66.7	C	FM40
160	50.8	19.05	11	38	100	-	-	72	-	B	FMA50.8
200	47.625	25.4	14	38	130	-	-	132	101.6	C	FMA47.625
200	60	25.7	14	40	130	-	-	132	101.6	C	FM60
250	47.625	25.4	14	38	160	-	-	150	101.6	C	FMA47.625
250	60	25.7	14	40	160	-	-	150	101.6	C	FM60
315	47.625	25.4	14	38	220	-	-	224	-	D	-
315	60	25.7	14	40	220	-	-	220	-	D	-

Cutters

- High radially inclined insert arrangement enables smooth machining and excellent chip evacuation

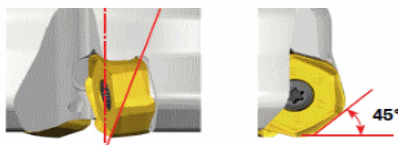

- Maximized cutter body stiffness

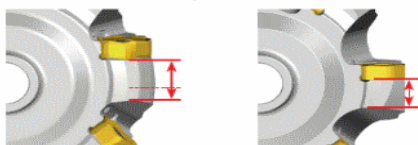


CHASE-12-MILL

Current

Higher thickness cutter design when fitted with the same size inserts

- Unequal placement of inserts minimizes vibration



- High inclination angle and inclined screw means a finer pitch cutter

